

Power supply 560PSU01

RTU560 product line



Power supply unit for RTU560 racks

- Input voltage 110...220 V DC
- Output voltage: 5 and 24 V DC
- Suitable for redundant power supply in 560MPR03/560SFR02

Application

The power supply unit 560PSU01 generates the two supply voltages (5 V DC and 24 V DC) for the RTU560 subracks 560MPR03 and 560SFR02. The output power is sufficient to supply a subrack with up to 4 communication units (CMU).

It is possible to configure redundant power supplies for project configurations with higher requirements to availability. In this configuration two power supply units 560PSU01 are operating in parallel mode. They are able to take over the full load, if one power supply fails. Only power supplies of the same type and rubric should be used for redundant operation.

The power supply unit 560PSU01 is available in the following version (rubric):

- R0002 Input range 110 ... 220 V DC (-20%... +15%)

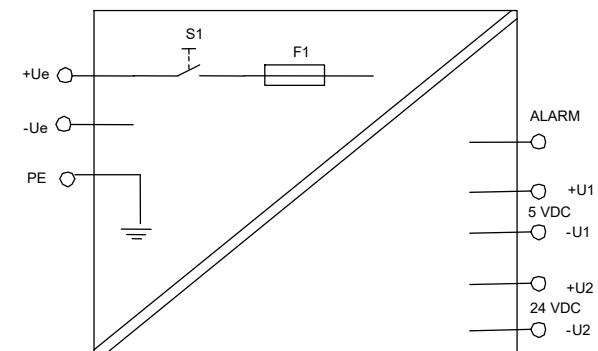


Figure 1: Block diagram 560PSU01

Characteristics

The power supply unit 560PSU01 has the following characteristics and functions:

- Potential isolation between the input and the outputs
- Cooling by natural convection
- Electronic power limitation on outputs
- Short-circuit proof outputs
- Over-voltage protection of the input
- Reverse voltage protection of the input
- Parallel operation with monitoring of redundant power supply configuration
- Controlled load balancing in redundant operation
- LEDs for monitoring the output voltages

- Alarm indication in case of failure
- Tolerant on input voltage interruptions up to 50 ms

Technical data

In addition to the RTU500 series general technical data, the following applies:

Power supply input

Input voltage	110 ... 220 V DC
Input tolerance range	-20%...+15%
Voltage Interruption	≤ 50ms; 0% Un; >48 V DC
Max. input current	0.6 ... 0.3A
Starting current	<10 A; 50µs - 1.5ms (Class S1 according to IEC 60870-4)
Fuse	F1 = 3.15 A T
Efficiency	62%
External circuit-breaker	The plus lead has to be protected by an upstream circuit-breaker with 10 A tripping current.
Reverse voltage protection	yes
Galvanic isolated between primary circuit and secondary circuit	yes

Power supply output

Total output power	44.3 W
Derating	-2,5 % / Kelvin; ≥ 50 °C

Output U1

Voltage	5.1 V DC
Tolerance	5.0... 5.3 V DC
Current min.	0.2 A
Current max.	5.5 A
Residual Ripple	≤ 30 mV _{ss}

Output U2

Voltage	24 V DC
Tolerance	22.4... 26.3 V DC
Current min.	0 A
Current max.	0.7 A
Residual Ripple	≤ 80 mV _{ss}

Mechanical layout

Dimensions	160 mm x 100 mm, 3HE euro card format 8R (40 mm) front panel
Housing type	Printed circuit board
Mounting	for mounting in RTU560 racks
Weight	0.6 kg

Connection type

RTU560 backplane connector	48 pole type F DIN 41612
----------------------------	--------------------------

Connection type

Supply connector	3 pole 7.62 mm pluggable screw terminal PKB 960/3/7,62 GN (included in delivery) 0.2... 2.5 mm ² / AWG 24 - AWG 12
------------------	--

Environmental conditions - climatic

Operating temperature	0 °C ... 70 °C EN 60068-2-14
Relative humidity	5 ... 95 % EN 60068-2-30 (non condensing)

Ordering information

560PSU01 R0002	1KGT006600R0002
----------------	-----------------

Hitachi Energy Germany AG
P.O. Box 42 01 30
68280 Mannheim, Germany

hitachienergy.com/rtu

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. Hitachi Energy does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of Hitachi Energy.
© 2024 Hitachi Energy
All rights reserved

ABB is a registered trademark of ABB Asea Brown Boveri Ltd. Manufactured by for a Hitachi Energy company.